

## Freestanding Model 3

### Product Description

Large premium water purifier that offers options for Hot, Cold, and Ambient temperature water. Unit is certified to UL 399 and CAN/CSA C22.2 No. 120. Lead-free design which is certified to remove 83 contaminants. Includes UV Light to reduce bacterial and algae growth in the Filtered Water Tank. Meets NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

### Product Specifications

<b>Model number</b>	ATFS-3
<b>Water</b>	Hot, Cold, and Ambient
<b>Filter Stages</b>	Sediment, Pre-Carbon, RO, VOC Carbon, UV, Mineralization, Alkalinization
<b>Finish</b>	Vacuum Formed Plastic and Coated Steel
<b>Power</b>	120 VAC 60hz
<b>MAX Current</b>	10A
<b>Activation by</b>	Button Press or Touch Free Sensor
<b>Mounting Type</b>	Free Standing
<b>Chilling Capacity*</b>	10 GPH
<b>Cooling Power</b>	100W
<b>Heating Power</b>	1000W
<b>Dimensions (L x W x H)</b>	66" X 18.5" X 18.42"
<b>Approx. Shipping Weight</b>	88.8lbs
<b>Installation Location</b>	Indoor only
<b>No. of People Served</b>	More than 100
<b>Water Dispense Rate</b>	0.8 GPM

\*Chilling Capacity is based on ASHRAE 18 Testing conditions with 80°F inlet water and 90°F Ambient temperature.

### OPTIONAL EARTHQUAKE BRACKET

Complies with ADA 308.2 accessibility requirements when installed according to the requirements outlined in these standards. Installation Instructions (PDF)

### Product Certified to Below Standards

NSF/ANSI 42, 53, 58, 401, P472, 61 (Q<sub>1</sub>), & 372 (lead free) by IAPMO R&T

UL 399 by SGS



PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_


DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_



## Freestanding Model 3

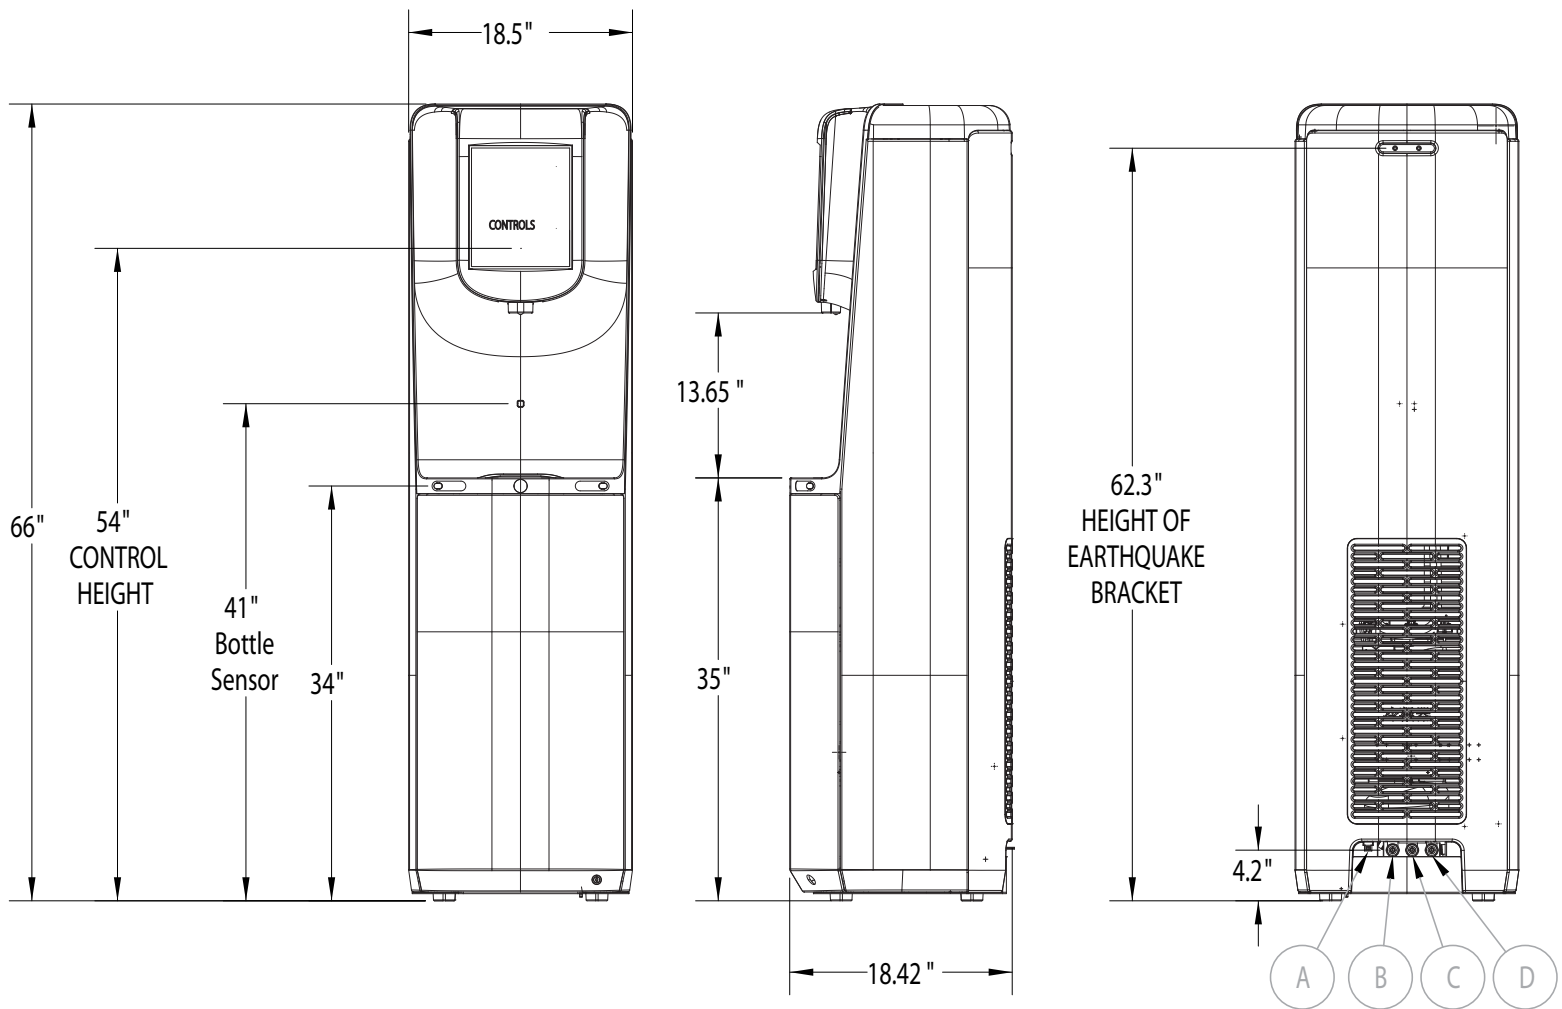

LEAVE AT LEAST 2 INCHES OF SPACE  
BEHIND THE WATERCOOLER FOR AIR  
FLOW AND PLUMBING CONNECTIONS

PLUMBING CONNECTIONS ARE 3/8" QUICK CONNECT FITTINGS

- A. ELECTRICAL CORD
- B. TANK DRAIN LINE (USED FOR MAINTNENCE ONLY)
- C. INLET
- D. RO WASTE LINE (MUST BE PLUMBED INTO MUNICIPAL SEWER)